




## H32DC

Versatile field performance



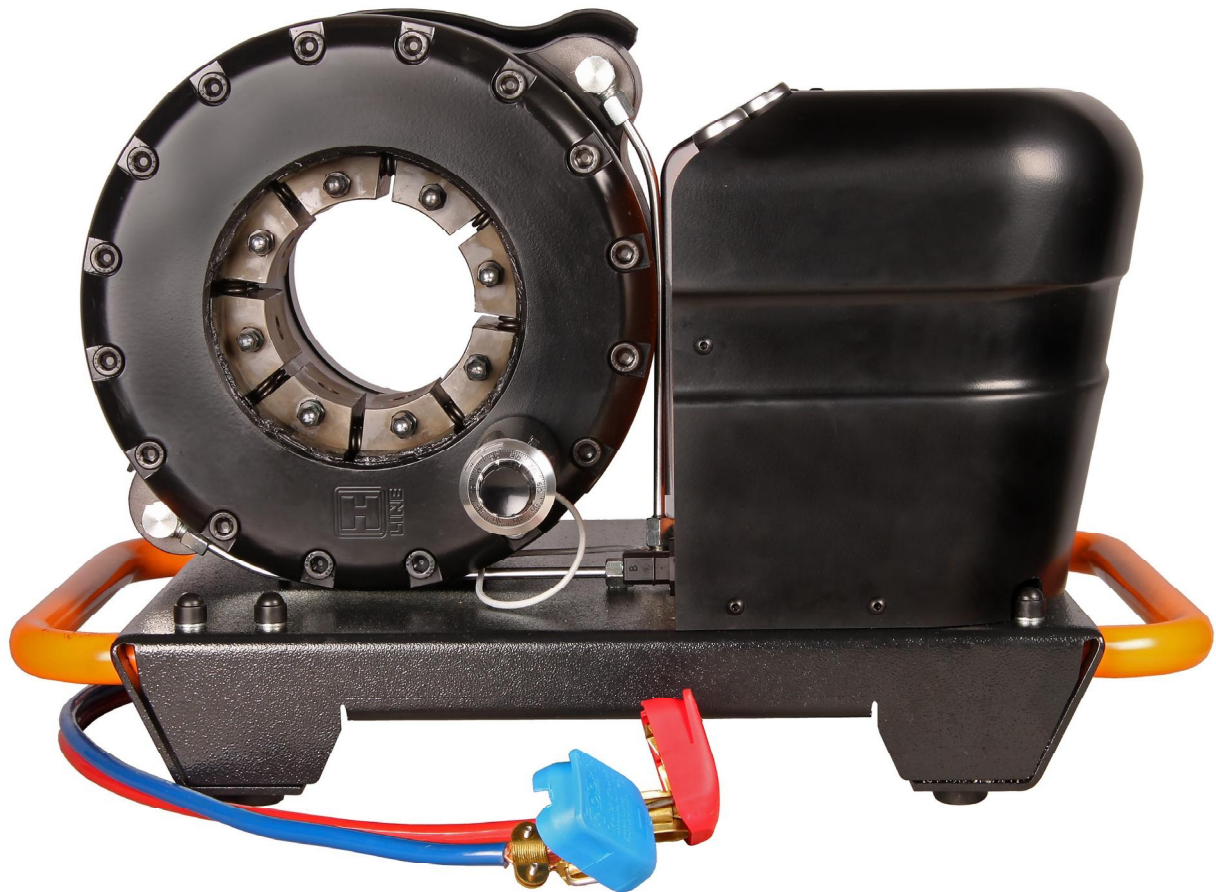

**DIMENSIONS**

Width/ Depth/ Height .....540x420x400 mm  
 Weight ..... 115 kg

**DESIGNATION**

H32DC 12V ..... 9028-00-15  
 H32DC 24V ..... 9028-00-16

**DIES:**

	<b>PART NUMBER:</b>
H32-10 .....	9060-32-10
H32-12 .....	9060-32-12
H32-14 .....	9060-32-14
H32-16 .....	9060-32-16
H32-19 .....	9060-32-19
H32-22 .....	9060-32-22
H32-26 .....	9060-32-26
H32-30 .....	9060-32-30
H32-34 .....	9060-32-34
H32-39 .....	9060-32-39
H32-45 .....	9060-32-45
H32-51 .....	9060-32-51
H32-57 .....	9060-32-57
H32-63 .....	9060-32-63
H32-69 .....	9060-32-69
H32-74 .....	9060-32-74
H32-78 .....	9060-32-78

**TECHNICAL DATA**

Crimping range in mm ..... 10 - 87 mm  
 Crimping range in inch ..... 0,39 - 3,42  
 Crimping force in metric tons ..... 200  
 Crimping force in kN .....2000  
 Maximum hose size in inch..... 2"  
 Die Set ..... H32  
 Maximum travel of dies in mm ..... 33 mm  
 Master die Diam. /Length in mm ..... 99 / 80  
 Master die Diam. /Length in inches ..... 3,31 / 3,15  
 Machine control..... Micrometer Screw  
 Motor size in kW 12V/24V. ....1,6 kW / 2,2 kW  
 Motor size in HP 12V/24V .....2,1 / 3,0  
 Colour ..... Black / Orange

Hydroscand Machine USA  
 915 Distribution Drive, Unit A, Columbus, OH 43228  
 T (614) 294-1640 sales@hydroscandmachineusa.com  
 www.hydroscandmachineusa.com

